



Placing warning triangles

If you must stop along a road, do the following:

- 1** Pull as far out of traffic as possible.
- 2** Turn on your hazard signal flashers and keep them on until triangles are placed.
- 3** Place the triangles within 10 minutes or as quickly as possible.

On a hill or curve with an obstructed view:

- Place two triangles at the rear of the vehicle—one at 10 feet and a second between 100 and 500 feet where it will provide ample warning to oncoming traffic.
- Place one triangle at the front of the vehicle at 100 feet.


Claims

1-800-626-8381

claims@protectiveinsurance.com


Loss Prevention & Safety Services

lossprevention@protectiveinsurance.com

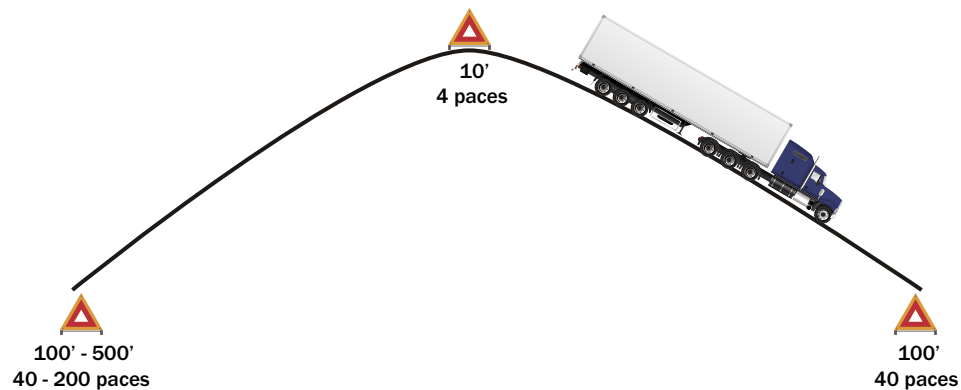


Far side

Approach side

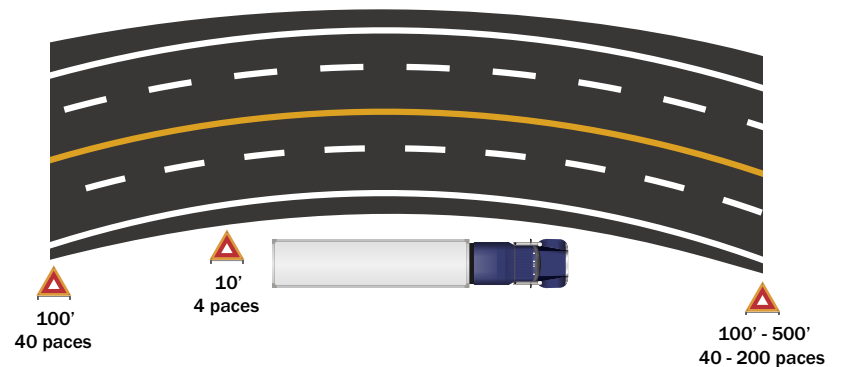

On a divided highway:

- Place all three triangles at the rear of the vehicle at 10 feet, 100 feet, and 200 feet.

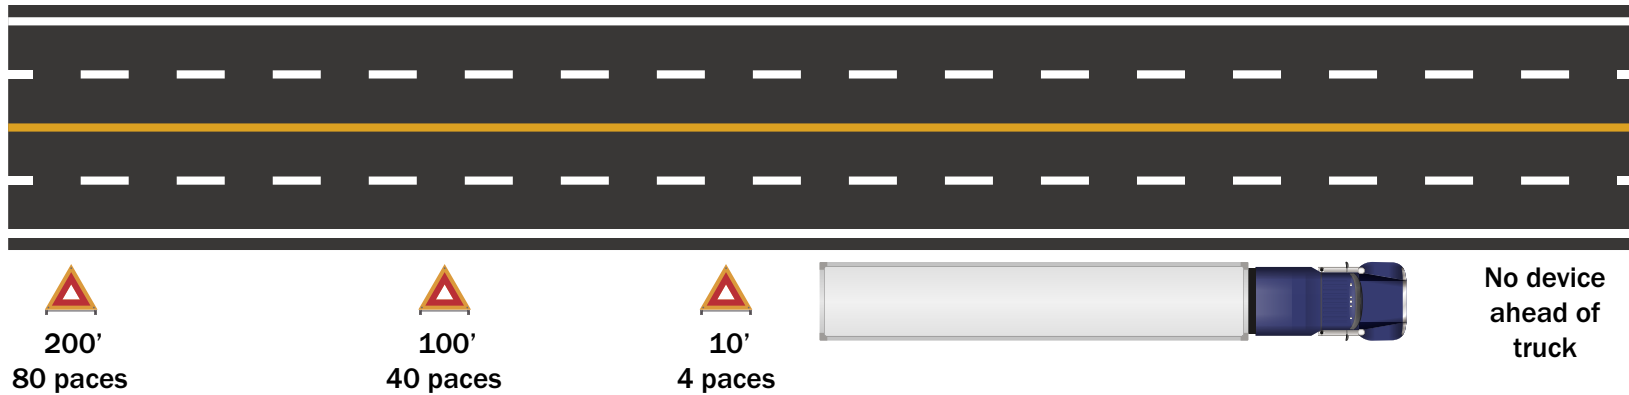

On a straight, two-way road:

- Place two triangles at the rear of the vehicle—one at 10 feet and a second at 100 feet.
- Place one triangle at the front of the vehicle at 100 feet.

