

PLACING WARNING TRIANGLES



IF YOU MUST STOP ALONG A ROAD, DO THE FOLLOWING:

- Pull as far out of traffic as possible
- Turn on your hazard signal flashers and keep them on until triangles are placed
- Place the triangles within ten minutes or as quickly as possible

CLAIMS

(800) 626-8381


claims@protectiveinsurance.com

LOSS PREVENTION & SAFETY SERVICES

lossprevention@protectiveinsurance.com


ON A HILL OR CURVE WITH AN OBSTRUCTED VIEW:

- Place two triangles at the rear of the vehicle – one at ten feet and a second between 100 and 500 feet where it will provide ample warning to oncoming traffic
- Place one triangle at the front of the vehicle at 100 feet

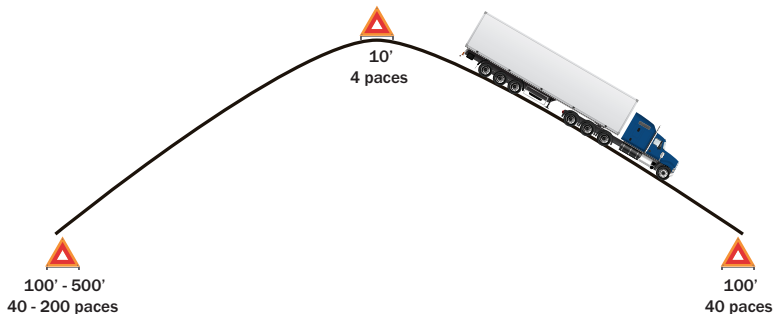


Far side

Approach side

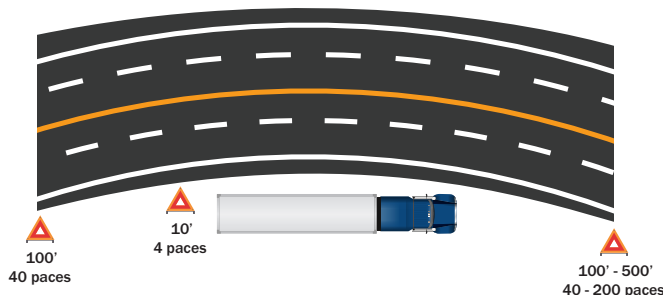

ON A DIVIDED HIGHWAY:

- Place all three triangles at the rear of the vehicle at 10 feet, 100 feet and 200 feet

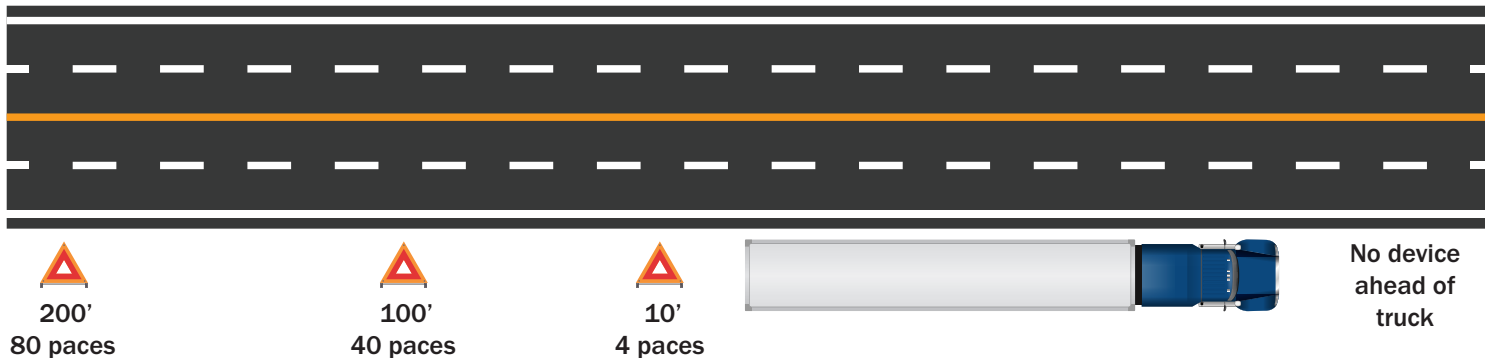

ON A STRAIGHT, TWO-WAY ROAD:

- Place two triangles at the rear of the vehicle – one at 10 feet and a second at 100 feet
- Place one triangle at the front of the vehicle at 100 feet

